



Key Features

- Support GPS L1/L2 and GLONASS L1/L2 bands.
- High stability and high repeatability at phase center.
- Antenna with high gain can has a superior tracking performance at low elevation angle.
- Very low noise figure.
- GIS&RTK applications.
- Ground plane independent.
- Ultra light weight :19g.

Helix Antenna HX-CH4601A


HX-CH4601A is a GPS L1/L2, GLONASS L1/L2 bands Helix antenna, which is designed for UAV system and other mobile devices. It can be used in aerial photographs, telemetry technology, disaster monitoring, traffic patrol, security monitoring applications.

This Helix antenna has exceptional pattern control, polarization purity and high efficiency in a very compact form factor. Antenna element has high gain and wide beam width to ensure the signal receiving performance of satellite at low elevation angle. HX-CH4601A is equipped with an O-ring that makes the antenna waterproof grade can reach IP65 once installed on a mating surface.


Technical Specifications

Antenna Specification	
Frequency Range	GPS L1/L2 GLONASS L1/L2
Impedance	50ohm
Polarization	RHCP
Axial Ratio	≤3dB
Azimuth Coverage	360°
Output VSWR	≤2.0
Peak Gain	2dBi
LNA Specification	
LNA Gain	33±2dB


Noise Figure	≤2.0dB
Output VSWR	≤2.0
Operation Voltage	3.3~12VDC
Operation Current	≤55mA
Ripple	±2dB
Mechanical Specification	
Dimension	φ 27.5*59mm
Connector	SMA male
Weight	19g
Environment Spec	
Storage /Operating Temp	-40°C ~ +70°C
Humidity	95% No-condensing



Top view

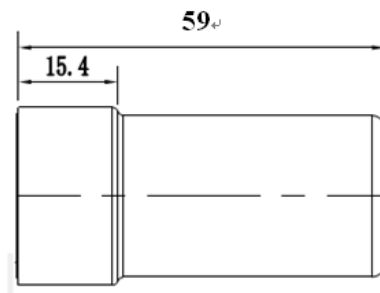

Side view



Bottom view

Harxon Corporation

www.harxon.com sales@harxon.com
Tel: +86 0755-26989948 Fax: +86 0755-26989994



HARXON AUTHORIZED DISTRIBUTION PARTNER